

旋转推出器

INVERTA PUSH



应用范围：

用于搬运滑板上的包状、纸箱或瓶装的货物，实现高效率，低维护成本的无托盘搬运与堆垛作业

Applications:

Used in operation that ships unit loads of bags or cartons, such as fertilizer, grain, cement, mail, sugar, canned goods, boxed goods, glass and plastic, offering high efficiency and low maintenance palletless handling.


产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- 满足在不同工况的工作
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- Fulfill the requirements for varied operating condition.
- Reasonable design with dependable world top quality hydraulic components.



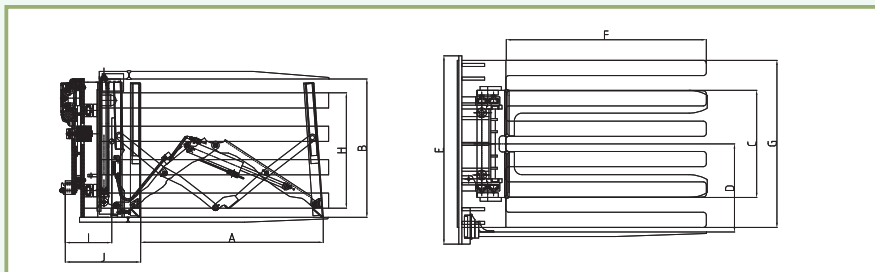

非侧移式

Non-Sideshifting

型 号 Model	载荷能力 Capacity (kg)	推出行程 Push Distance A (mm)	货叉调距范围 Forks OP/CL Range B (mm)	货叉间距 Forks Spacing C (mm)	侧控张臂范围 Sideplate OP Range D (mm)	面板宽度 Face-plate Width E (mm)	叉板长度 Platen Length F (mm)	叉板总宽 Platen Width G (mm)	侧板高度 Side -plate Height H (mm)	水平重心 Horizontal Center of Gravity I (mm)	失载距 Effective hickness J (mm)	自重 Weight (kg)
G32RB15-120B48	1500	1210	900-1500	705	600-760	1004	1200	1100	760	350	496	1400
G32RB20-120B48	2000	1210	900-1500	705	600-760	1004	1200	1100	760	350	496	1500

侧移式

Sideshifting

型 号 Model	载荷能力 Capacity (kg)	推出行程 Push Distance A (mm)	货叉调距范围 Forks OP/CL Range B (mm)	货叉间距 Forks Spacing C (mm)	侧控张臂范围 Sideplate OP Range D (mm)	面板宽度 Face-plate Width E (mm)	叉板长度 Platen Length F (mm)	叉板总宽 Platen Width G (mm)	侧板高度 Side -plate Height H (mm)	水平重心 Horizontal Center of Gravity I (mm)	失载距 Effective hickness J (mm)	自重 Weight (kg)	侧移量 Side Shift (mm)
G32RS15-120B48	1500	1210	900-1500	705	600-760	1004	1200	1100	760	350	496	1500	±100
G32RS20-120B48	2000	1210	900-1500	705	600-760	1004	1200	1100	760	350	496	1600	±100

注:

- 1、承载能力是载荷中心为 600mm 的设计值，实际的叉车 / 属具综合承载能力请从叉车制造商获取。
- 2、货叉调距范围：最小值为货叉合拢时两货叉的内侧间距，最大值为货叉张开时两货叉的外侧间距。
- 3、要求叉车增加 2 组附加油路。
- 4、产品出厂时，包含货叉和挡货架。
- 5、电磁阀为选配件
- 6、订购时请提供托盘和货物的尺寸

Note:

1. The capacity is designed at 600mm load centre, contact the forklift manufacture for the actual capacity of forklift/attachments.
2. Forks opening range: minimum is inside to inside of the forks, maximum is outside to outside of the forks.
3. Two additional hydraulic circuits required on truck.
4. Forks and load backrest included.
5. Optional solenoid.
6. Dimensions of pallet and load is required before order.

