

旋转器

ROTATORS



应用范围：

360° 旋转，广泛应用于石油、化工、冶金、铸造、港口等

Applications:

Used in food processing and manufacturing for inverting and dumping loads. Rotators add 360° revolving motion, in both directions, to truck forks.


产品特点：

- 生产最大承载能力 10000kg 的叉车属具，填补国内空白
- 高强度全钢结构设计，满足用户高效率连续作业
- 360° 双向旋转，满足在不同工况的工作
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Grip can manufacture forklift truck attachments with max.capacity to 10000kg, filling the domestic gaps.
- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- 360° revolving motion, in both directions.
- Reasonable design with dependable world top quality hydraulic components.



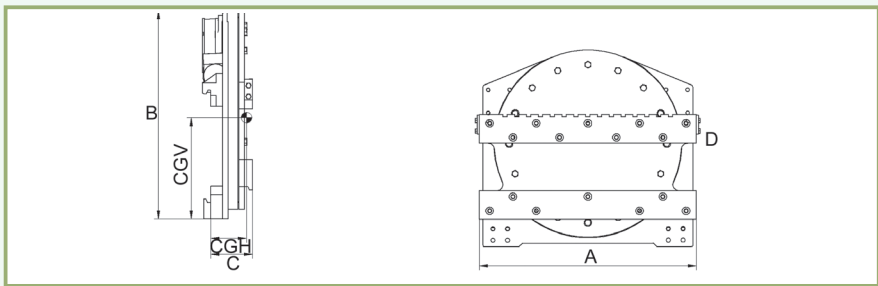

旋 转 器 *Rotator*

型 号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre	横梁宽度 Frame Width	失 载 距 Effective Thickness	水平重心 Horizontal Center of Gravity CGH (mm)	自 重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	框架宽度 Frame Width	安装等级 (旋转器/货 叉) Mounting Class (Rotator/ Tine)
	(kg/mm)	A (mm)	C (mm)				B (mm)	
G10R20-800A22	2000/500	800	174	85	310	270	825	2/2
G10R20-950A22		950			320		975	
G10R25-850A22	2500/500	850	159	80	325	305	875	2/2
G10R25-950A22		950			335		975	
G10R30-950A22	3000/500	950	204	82	340	265	975	2/2
G10R30-115A22		1150			360		1175	
G10R30-950B32		950	204	110	410		975	3/2
G10R30-115B32		1150			430		1175	
G10R35-110B33	3500/500	1100	176	120	440	285	1125	3/3
G10R35-120B33		1200			450		1225	
G10R40-100B33	4000/600	1000	165	90	530	345	1025	3/3
G10R40-120B33		1200			540		1225	
G10R40-150B33		1500			570		1525	
G10R45-100B33	4500/600	1000	258	80	620	345	1025	3/3
G10R45-100C43				130	640	285		4/3
G10R45-120B33				1200	80	650	340	1225
G10R45-120C43		130			660	280		4/3
G10R45-150B33		1500			80	670	335	1525
G10R45-150C43				130	680	275		4/3
G10R50-150C44	5000/600	1500	223	130	700	280	1525	4/4
G10R50-160C44		1600		130	720	280	1525	4/4
G10R60-170C44	6000/600	1700	194	96	860	368	1761	4/4
G10R80-160C44	8000/600	1600	145	89	980	547	1665	4/4
G10R100-000N00	10000/750	1500			1200		1570	

注:

1. 叉车需要增加1组附加油路;
2. 旋转器发货时不含货叉, 可根据用户要求加配货叉(货叉可直接挂装);
3. 以上产品型号为常用产品, 可根据实际工况要求提供相应产品。

Note:

1. One additional hydraulic required on truck.
2. Forks excluded. Optional forks according to requirements.
3. All products as listed are standard models, custom products can be provided according to detailed requirements.

流 量 与 压 力 *Hydraulic Flow & Pressure*

型 号 Model	最 小 流 量 Minimum	推 荐 流 量 Recommended	最 大 流 量 Maximum	最 大 压 力 Maximum Pressure
	LPM			BAR
G10-18	20	25	40	180
G10-22				
G10-30				
G10-35				
G10-40				
G10-45				
G10-50				

旋 转 扭 矩 *Rotating Torque*

型 号 Model	转 速 Rotating Speed	扭 矩 Torque
G10-18	5r/min@25LPM	4800Nm@140Bar
G10-22	5r/min@60LPM	8155Nm@140Bar
G10-30		
G10-35		
G10-40	4r/min@60LPM	10000Nm@140Bar
G10-45		
G10-50		