

纸箱夹

CARTON CLAMPS

应用范围：

适用于家电及电子行业纸箱包装产品，如冰箱、彩电、洗衣机等

Applications:

Used in palletless handling of home appliances, consumer electronics, packaged foods, chemicals and plastics.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- E型槽的整体框架，提高产品的稳定性和寿命
- 多块橡胶垫组合夹臂，易于更换，节省维修费用
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- E-Style-Slot frame provides excellent stability and longer operating life.
- Multiple rubber pads mounting in both clamps arms, easily replacement, reduce maintenance cost.
- Reasonable design with dependable world top quality hydraulic components.


产品系列：

- 非侧移式
- 侧移式

Product Series:

- Non-sideshifting
- Sideshifting



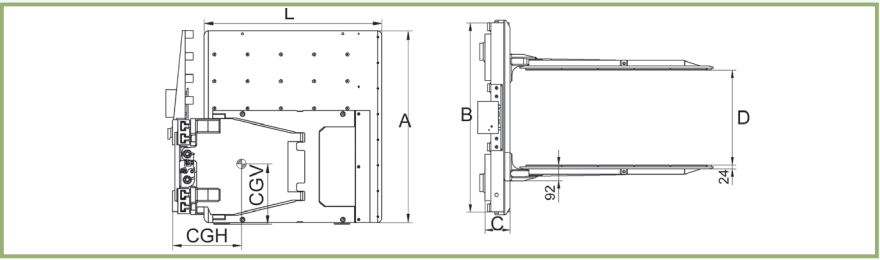

非侧移式 Non-Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	臂长 Arm Length L (mm)	臂高 Arm Height A (mm)	框架宽度 Frame Width B (mm)	安装 等级 Mounting Class		
G09B07-200A26	800/500	550-2000	127	408	680	300	1000	1200	1100	2		
G09B07-200A46	700/600	550-2000	127	412	720	300	1200	1200	1100	2		
G09B12-200A26	1200/500	550-2000	184	420	900	300	1000	1200	1140	2		
G09B11-200A46	1100/600			425	980		1200					
G09B10-200A66	1000/700			430	1100		1400					
G09B16-200A46	1600/600	550-2000	187	430	1000	300	1200	1200	1140	2		
G09B15-200A66	1500/700			460	1150		1400					
G09B14-200A86	1400/800			475	1250		1600					
G09B15-200A49	1500/600			430	1170		305				1200	1500

- 注:
 1. 侧移式要求叉车增加2组附加油路, 非侧移式要求叉车增加1组附加油路,
 2. 整机出厂时配有四档调压阀,
 3. 以上产品型号为常用产品, 可根据实际工况要求提供相应产品。

Note:
 1. Two additional hydraulic circuits required on truck for Sideshifting models, one additional on truck for Non-Sideshifting models.
 2. All carton clamps are equipped with 4-position pressure relief valve.
 3. All products as listed are standard models, custom products can be provided according to detailed requirements.

附件: Accessories:

四档调压阀能同时设定四个压力值其中一个为原叉车系统压力其它三个用来满足不同货物夹持力要求

Keeping the truck system relief pressure, the 4-position pressure relief valve could also pre-set three pressure selections to meet the customer's requirement for clamping different load.



侧移式 Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	臂长 Arm Length L (mm)	臂高 Arm Height A (mm)	框架宽度 Frame Width B (mm)	安装 等级 Mounting Class
G09S07-200A26	800/500	550-2000	127	408	680	300	1000	1200	1100	2
G09S07-200A46	700/600		127	412	720		1200		1100	
G09S12-200A26	1200/500		150	415	900		1000		1140	
G09S10-200A46	1000/600	550-2000	150	420	980	300	1200	1200	1140	2
G09S10-200A66	1000/700			430	1100		1400			
G09S16-200A46	1600/600			425	1000		1200			
G09S15-200A66	1500/700	550-2000	150	460	1150	300	1400	1200	1140	2
G09S14-200A86	1400/800			475	1250		1600			
G09S15-200A49	1500/600			430	1170		305			