

旋转叉夹

TURNING FORK CLAMPS

应用范围：

旋转叉适用于搬运紧凑堆垛的软包货物，还能搬运托板货物和箱式货物，另外在对外发货时旋转叉还能将本单位内部使用的高档托盘换为廉价的发货托盘，不仅能提高搬运效率还能节约生产成本。

Applications:

Used in shipping, receiving and order picking operations requiring both palletless handling of boxes, crates and cartons, as well as palletized loads and scrap bales.


产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- 360°双向旋转，满足在不同工况的工作
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continous operation with high efficiency.
- 360° revolving motion, in both directions.
- Reasonable design with dependable world top quality hydraulic components.



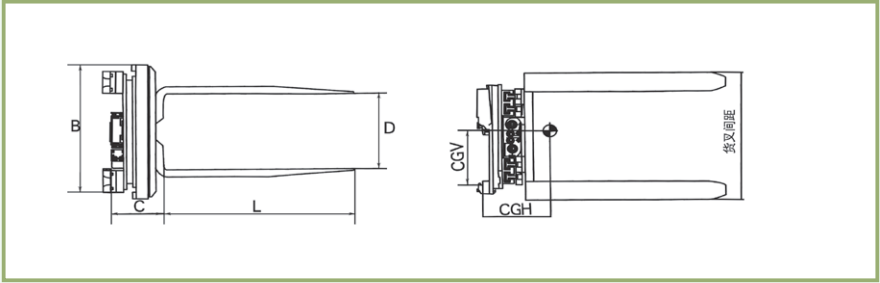

旋转叉夹

Turning Fork Clamps

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre	张臂范围 Opening Range	失载距 Effective Thickness	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	叉长 Arm Length L (mm)	货叉间距 Fork Spacing (mm)	货叉 数量 Forks	框架宽度 Frame Width B (mm)	安装 等级 Mounting Class
	(kg/mm)	D (mm)	C (mm)							
GJ14RL20-194A44	2000/500	665-1945	336	365	670	1200	650	4	1040	2
GJ14RL20-216A44	2000/500	735-2165		360	690				1100	
GJ14RL27-216B44	2700/500	735-2165	352	425	795	1200	650	4	1140	3
G14R15-194A24	1500/500	645-1945	255	260	760	1000	650	4	1040	2
G14R15-194A44				265	780			1200		
G14R20-194A24	2000/500	645-1945	341	360	810	1000	650	4	1040	2
G14R20-194B24					830			1200		4
G14R20-194A44				830	1200	4		2		
G14R20-194B44				830	1200	4		3		
G14R25-216B44	2500/500	735-2165	352	425	900	1200	650	4	1140	3
G14R25-216B46					1000		880			
G14R30-216B44	3000/500	735-2165	355	420	930	1200	650	4	1140	3
G14R30-216B46					1030		880			
G14R35-216B44	3500/500	735-2165	360	385	1000	1200	880	4	1140	3
G14R35-216C44								4		4
G14R35-216B46					6			3		
G14R35-216C46					1150			6		4

注:

- 需要叉车增加2组附加油路;
- 货叉间距是指货叉外侧距离;
- 以上产品型号为常用产品,可根据实际工况要求提供相应产品。

Note:

- Two additional hydraulic circuits required on truck.
- Fork spacing is outside to outside of the forks.
- All products as listed are standard models, custom products can be provided according to the detailed requirements.

