

单双托盘叉

SINGLE-DOUBLE PALLET HANDLERS



应用范围:

两对货叉由液压驱动快速动作, 分开时可一次搬运两个托盘, 合拢时可以像普通叉车一样进行灵活机动作业, 特别适合集装箱内货物的搬运与堆垛。

Applications:

Used for the bottling, brewing, production or warehouse/shipping industries. Forks are hydraulically positioned for fast and efficient material handling.


产品特点:

- 高强度全钢结构设计, 满足用户高效率连续作业
- 设计合理, 美观大方, 采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency,
- Reasonable design with dependable world top quality hydraulic components.



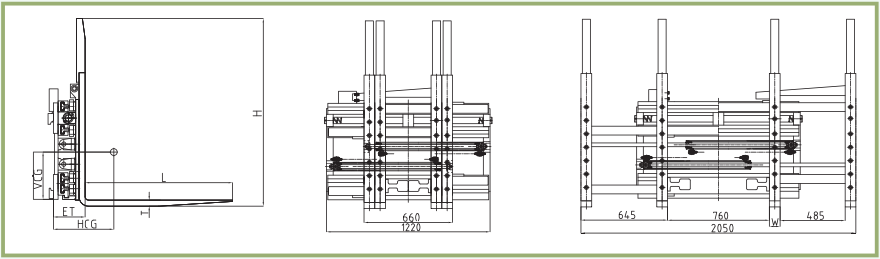

非侧移式

Non-Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	叉车货架架 最小宽度 Min Width of Truck Carriage (mm)	总高 Overall Height H (mm)	货叉尺寸 Forks Size 长×宽×厚 (L×H×W) (mm)	安 装 等 级 Mounting Class	侧移量 Side Shift (mm)
G27B15-205A30	1500/600	232	242	490	272	915	1400	1100×80×45	2	0
G27B20-205A30	2000/600	235	245	510	275	915	1400	1100×80×45	2	0
G27B20-205B30	2000/600	235	245	520	275	915	1400	1100×80×45	3	0
G27B25-205B30	2500/600	236	198	650	285	1040	1400	1100×80×45	3	
G27B30-205B30	3000/600	240	195	680	285	1040	1400	1100×80×50	3	
G27B35-205B30	3500/600	248	206	760	297	1040	1400	1100×80×60	3	0
G27B40-205C30	4000/600	255	198	800	305	1220	1400	1100×80×65	4	0
G27B50-205C30	5000/600	280	178	860	310	1220	1400	1100×80×70	4	0
侧移式 Sideshifting										
G27S15-205A30	1500/600	267	252	590	272	915	1400	1100×80×45	2	±100
G27S20-205A30	2000/600	270	255	610	275	915	1400	1100×80×45	2	±100
G27S20-205B30	2000/600	270	255	620	275	915	1400	1100×80×45	3	±100
G27S25-205B30	2500/600	286	210	750	285	915	1400	1100×80×45	3	±100
G27S30-205B30	3000/600	290	205	770	285	1040	1400	1100×80×50	3	±100
G27S35-205B30	3500/600	298	226	850	297	1040	1400	1100×80×60	3	±100
G27S40-205C30	4000/600	305	218	890	305	1220	1400	1100×80×65	4	±150
G27S50-205C30	5000/600	330	198	950	310	1220	1400	1100×80×70	4	±150

流量及压力要求

Hydraulic Flow & Pressure

型号 Model	最小流量 Minimum	推荐流量 Recommended	最大流量 Maximum	最大压力 Maximum Pressure
	LPM			BAR
G27S/B15	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B20	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B25	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B30	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B35	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B40	15 LPM	25 LPM	40 LPM	160 Bar
G27S/B50	15 LPM	25 LPM	40 LPM	160 Bar

注:

- 1、承载能力是载荷中心为 600mm 的设计值，实际的叉车 / 属具综合承载能力请从叉车制造商获取。
- 2、非侧移式产品，要求叉车增加 2 组附加油路；非侧移式产品，要求叉车增加 1 组附加油路。
- 3、可根据客户特殊工况要求，提供相应匹配产品。

Note:

1. The capacity is designed at 600mm load centre, contact the forklift manufacturer for the actual capacity of forklift/attachments.
2. Two additional hydraulic circuits required on truck.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.