

轮胎夹

TIRE CLAMPS

CE

应用范围：

可实现高效安全的轮胎堆垛和装卸作业

Applications:

Used in handling tire loading and unloading work with safety and high efficiency.


产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- 360°双向旋转，满足在不同工况的工作
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- 360° revolving motion, in both directions.
- Reasonable design with dependable world top quality hydraulic components.



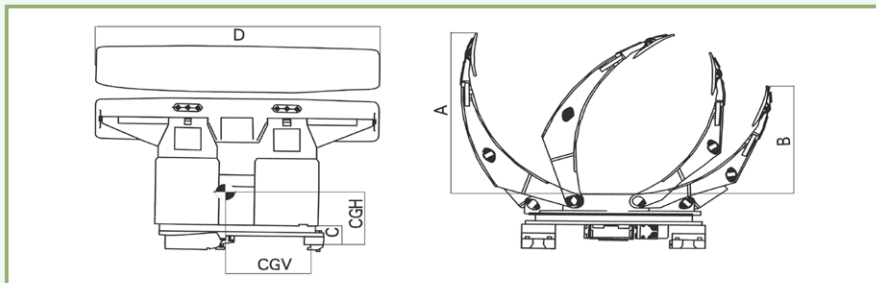

轮胎夹

Tire clamps

型号 Model	载重能力 Capacity (kg)	纸卷直径 Roll Range E (mm)	失效距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	垂直重心 Vertical Center of Gravity CGV (mm)	长臂长 Long Arm Length A (mm)	短臂长 Short Arm Length B (mm)	夹板尺寸 Pad Size D (mm)	安装 等级 Mounting Class
G13R12-130A20	1200	400-1300	240	230	660	340	800	520	1000	2
G13R12-130A70					710				1500	
G13R20-160A70	2000	610-1600	249	205	915	350	960	780	1500	2
G13R20-160B70										3
G13R27-160B70	2700	610-1600	249	310	1170	440	960	780	1500	3
G13R22-185B70	2200	700-1850	249	315	1320		1130	830		

注:

1. 要求叉车增加2组附加油路。
2. 可根据客户实际情况提供非标准型夹板。
3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:

1. Two additional hydraulic circuits required on truck.
2. Special pad is available on request.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

