

砖块夹

BLOCK CLAMPS



应用范围：

主要用于搬运坚硬货物、石料、块状的行业，如石料、水泥砖等货物的无托盘搬运及堆垛作业

Applications:

Used in palletless handling for tough loads, such as blocks, cement bricks.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- 使用可拆卸的软质、耐磨聚氨酯胶条，适用寿命长，维护方便。
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- Using soft & durable polyurethane pads, easy to replace.
- Reasonable design with dependable world top quality hydraulic components.


产品系列：

- 非侧移式
- 侧移式
- 钟罩式

Product Series:

- Non-sideshifting
- Sideshifting
- Overhead



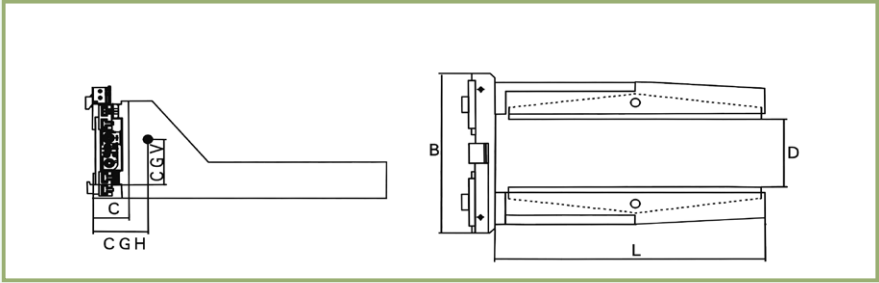

侧移式 Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	臂长 Arm Length L (mm)	框架宽度 Frame Width B (mm)	安装等级 Mounting Class
GJ25SL20-166A41	2000/500	240-1660	147	330	490	1200	1100	2
GJ25SL27-166B41	2700/500	320-1740	158	335	590	1200	1140	3
G25S20-166A21	2000/500	210-1660	147	335	610	1000	1100	2
G25S20-166B21								3
G25S20-166A41				2				
G25S20-166B41				3				
G25S25-166B21				3				
G25B25-166B41	2500/500	240-1660	158	330	710	1000	1140	3
G25B30-166B21	3000/500	240-1660	161	335	750	1200	1140	3
G25B30-166B41				740	1000	3		
G25B30-166B41				800	1200	3		
G25B30-166B61				860	1400	3		

钟罩式 Overhead

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	张臂范围 Opening Range D (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	臂长 Arm Length L (mm)	框架宽度 Frame Width B (mm)	安装等级 Mounting Class
G35B15-120B44	1500/1150	1000-1300	76	603	810	1200	1890	3

注:

- 叉车需要增加2组附加油路。
- 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:

- Two additional hydraulic circuits required on truck.
- All products as listed are standard models, custom products can be provided according to the detailed requirements.