

# 载荷稳定器

LOAD STABILIZERS

CE

#### 应用范围：

适用于食品、饮料行业瓶装货物的搬运，通过压板固定货物，避免货物在搬运过程中滑落，特别适用于易碎品的搬运及堆垛作业。

#### Applications:

Used for handling food, beverage, avoid load slip-out by clip fixed, especially for the fragile load warehousing operation.

#### 产品特点：


- 高强度全钢结构设计，满足用户高效率连续作业
- 设计合理，美观大方，采用世界上最优质的液压元件

#### Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- Reasonable design with dependable world top quality hydraulic components.



GRIPFTA

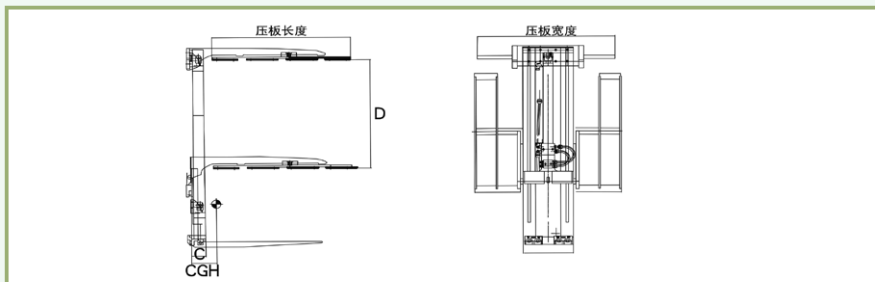

### 非侧移式 *Non-Sideshifting*

型号 Model	载重能力/ 载荷中心 Capacity/ Load Centre  (kg/mm)	张臂范围 Opening Range  D (mm)	失载距 Effective Thickness  C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight  (kg)	压板尺寸 Contacting Pad Size  (mm)	安装等级 Mounting Class
G38B20-210B00	2000/500	1150-2100	65	130	350	750×750	3
G38B20-210B01				150	360	750×900	
G38B20-210B11			165	75	375	900×900	
G38B20-210B33					400	1100×1100	
G38B30-210B00	3000/500	1150-2100	75	165	420	750×750	3
G38B30-210B01					430	750×900	
G38B30-210B11			80		440	900×900	
G38B30-210B33					450	1100×1100	

注：  
以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:  
All products as listed are standard models, custom products can be provided according to the detailed requirements.

