

两用叉夹

TURNING CLAMPS

应用范围：

两用叉既能搬运托盘货物又能夹持货物，广泛适用于制造业、回收业、仓储以及物流等行业，将夹臂翻转成水平位置可以搬运各种传统的托盘货物，翻转成垂直位置可以夹持软包、纸箱以及轮胎等货物。

Applications:

Used in a variety of manufacturing, receiving, warehousing and shipping environments that require both clamp handling and pallet handling. Rotate the arms to the vertical position for clamping, or to the horizontal position to handle most types of conventional pallets.

产品特点：

- 高强度全钢结构设计，满足用户高效率连续作业
- 夹臂具有水平、垂直两种旋转可调的位置模式，因此集成了叉起和夹持的功能
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- Vertical & horizontal positions provides clamping and pallet handling functions.
- Reasonable design with dependable world top quality hydraulic components.


产品系列：

- 非侧移式
- 侧移式

Product Series:

- Non-sideshifting
- Sideshifting



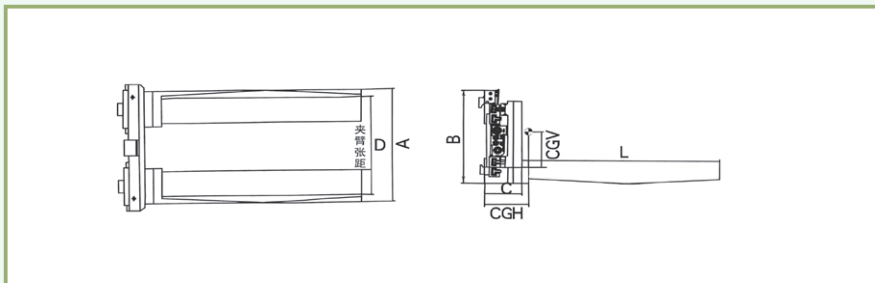

非侧移式

Non-Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	夹臂张距 Clamping Range D (mm)	货叉张距 Forks Range A (mm)	失载距 Effective THickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	叉长 Arm Length L (mm)	框架宽度 Frame Width B (mm)	安装 等级 Mounting Class
GJ15BL20-179A10	2000/500	490-1790	560-1860	305	265	470	900	1040	2
GJ15BL20-179B10									3
GJ15BL20-179A20	2000/500	490-1790	560-1860	305	280	480	1000	1040	2
GJ15BL20-179B20									3
GJ15BL20-179A40	2000/500	490-1790	560-1860	305	300	500	1200	1040	2
GJ15BL20-179B40									3

侧移式

Sideshifting

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	夹臂张距 Clamping Range D (mm)	货叉张距 Forks Range A (mm)	失载距 Effective THickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	叉长 Arm Length L (mm)	框架宽度 Frame Width B (mm)	安装 等级 Mounting Class
GJ15SL20-179A10	2000/500	490-1790	560-1860	305	265	470	900	1040	2
GJ15SL20-179B10									3
GJ15SL20-179A20	2000/500	490-1790	560-1860	305	280	480	1000	1040	2
GJ15SL20-179B20									3
GJ15SL20-179A40	2000/500	490-1790	560-1860	305	300	500	1200	1040	2
GJ15SL20-179B40									3

注:

1. 要求叉车增加2组附加油路。
2. 货叉间距是指货叉外侧距离。
3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。
4. 侧移式两用叉夹可选择：夹板翻转手动式 夹板翻转液压式（附加一个两位四通电磁阀）

Note:

1. Two additional hydraulic circuits required on truck.
2. Fork spacing is outside to outside of the forks.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.
4. Side shifting turning clamps options: Splint flip manual & Splint to flip hydraulically positioned; with an additional solenoid.

