

废纸夹

BROKE PAPER CLAMPS

CE

应用范围:

主要用于夹持搬运各种非规范包装货物，如废纸、秸秆、化纤等货物，广泛适用于农牧业、回收业、纺织等行业。

Applications:

Used in handling loads without standard package, such as broke paper, straw, chemical fiber.

产品特点:


- 高强度全钢结构设计，满足用户高效率连续作业
- 设计合理，美观大方，采用世界上最优质的液压元件

Features:

- Rugged all-steel construction, meet the requirements for continuous operation with high efficiency.
- Reasonable design with dependable world top quality hydraulic components.



GRIPETA

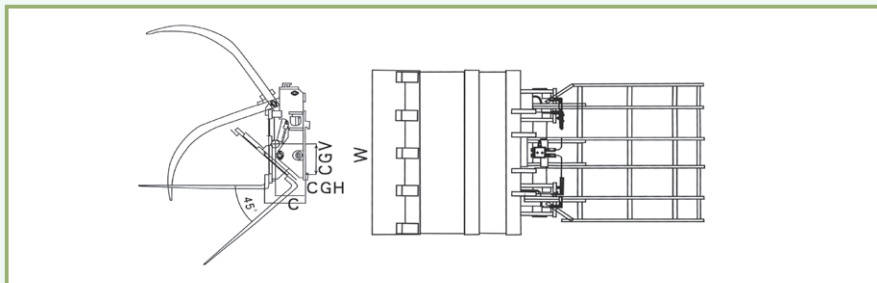

带货叉废纸夹

Broke paper clamps

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	叉宽 Fork Width W (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	货叉倾翻角 (后/前) UpWard/ DownWard Angle	安装 等级 Mounting Class
G18B20-120B20	2000/500	1200	350	400	900	5/45	3
G18B20-120B40				450	940		
G18B25-120B20	2500/500	1200	390	420	970	5/45	3
G18B25-120B40				470	1000		
G18B25-120B60				520	1030		

不带货叉废纸夹

Broke paper clamps

型号 Model	载荷能力/ 载荷中心 Capacity/ Load Centre (kg/mm)	叉宽 Fork Width W (mm)	失载距 Effective Thickness C (mm)	水平重心 Horizontal Center of Gravity CGH (mm)	自重 Weight (kg)	货叉倾翻角 (后/前) UpWard/ DownWard Angle	安装 等级 Mounting Class
G18B20-110A00	2000/500	1100	385	330	585	5/45	2
G18B30-110B00	3000/500	1100	390	335	595	5/45	3

注:

1. 叉车需要增加2组附加油路。
2. 倾翻式废纸夹下倾45°。
3. 以上产品型号为常用产品，可根据实际工况要求提供相应产品。

Note:

1. Two additional hydraulic circuits required on truck.
2. Forward tipping 45 degree.
3. All products as listed are standard models, custom products can be provided according to the detailed requirements.

